



ADBLUE® STORAGE AND DISPENSING

Gilbarco Veeder-Root's **most compact** AdBlue Storage and Dispensing solution available. **No underground installation** required, easy to maintain, with **multiple configuration** and application possibilities.

- ✓ Easy to install and operate
- ✓ Various storage capacities
- ✓ Fail-safe solution
- ✓ Multiple fuelling points
- ✓ MID certified



AdBlue® Storage and Dispensing Solutions

Perfect for existing forecourt structures where space is at a premium.



Compact Solution
(MID certified ex factory)



Integrated Solution

Discover the world's most compact and smallest footprint AdBlue storage and dispensing solution available. No underground civil works and minimal overground installation work required, perfect for forecourts and areas where space is at premium. Available with an integrated satellite AdBlue dispenser, or combined for an even more compact solution.



Easy to install and operate

No underground civil works required.
Adjustable frames available as an option for uneven grounds.



Peace of mind

Trusted and proven Gilbarco Veeder-Root hydraulics and technologies for high uptime and ease of maintenance.



Fail-safe storage solution

Operates in extreme environmental conditions, with a temperature range of -20°C (-40°C winter package) to +40°C, with fibreglass housing for added protection. Also features leak detection, overfill protection and minimum level detection. Visuals and alarms are available as add-ons.



Multiple fuelling points


Single or double-sided dispensing with options to include multiple satellite dispensers, from a single storage tank.





Various capacity options

Choose the size that best fits your customer needs and available forecourt space. Available from 1.500 to 10.000 litres.


Product Specification

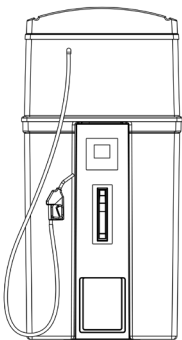

Compact Solution

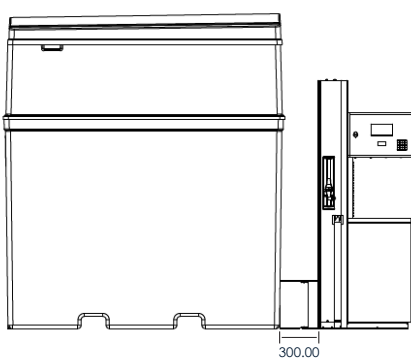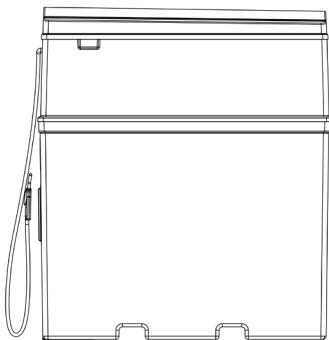

Integrated Solution



Size and Technical Specifications

Tank Capacity (Litres)	Fuelling position	Length (mm)*	Width (mm)	Height (mm)
1.500	FRONT	2190	840	1550
3.000	FRONT	1680	1150	2500
	SIDED	2190	1150	2500
4.000	FRONT	2150	1150	2530
	SIDED	2740	1150	2530
6.000	FRONT	3390	1150	2500
	SIDED	3910	1150	2500
8.000	FRONT/SIDED	4815	1210	2540
10.000	FRONT/SIDED	5910	1305	2540

*Length = Base dimension

Housing/Tanks	Fully bunded housing (2 tanks): Outer fibreglass tank for 1.500 to 6.000l volume, XPS sandwich panels for 8.000 & 10.000l volume. Inner single-walled polyethylene tank with round galvanized reinforcements piping stainless steel
Colour	Standard white
Pump	Submersible pump 230V/550W
Anti-freeze heating	Standard heating down to -25°C, optional package for cold regions down to -40°C
Filling point	In technical compartment. 2" Dry connecting coupling Acoustic and visual overflow protection system
Level indicator	Mechanical gauge, option: digital display
Power supply	1 x 230V 50-60 Hz 10 A (+16 A for cold region option) 3x1.5mm ² for non-hazardous area

Options

Overflow protection	A plug on the container when combined with the truck system prevents overflows
Adjustable subframe	For all sizes when ground is not levelled
Key switch for pump	Switches off the pump inside the container, but not the heaters
Probe installation	Prepared for Veeder-Root probes as standard. Adapters for other probe brands also available as an option.
Leak detection	System with acoustic (buzzer tone) and visual (LED) alarm
Other options	ATEX certification, Alarms for minimum level, integration with additional dispensers, customer branding and more

Your dispenser, your way.

Our experience and expertise in the fuelling industry means we understand a forecourt's business and consumer needs better than anybody. Gilbarco Veeder-Root stands for quality, innovation and seamless integration.

To find out more about how you could grow your business with our industry leading dispensing solutions, speak to your relationship manager or visit www.gilbarco.com/eu



Email: euenquiries@gilbarco.com

Website: www.gilbarco.com/eu



**GILBARCO
VEEDER-ROOT**